


SC-HVR5M04-S1

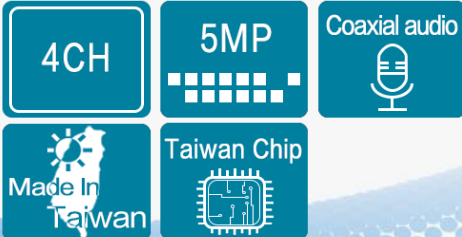

ISO 9001:2015

Qualified factory number:10610013600676

Key Features

Remote connection monitoring (Support: iOS、Android)

Up to 6 cameras can be connected:

4CH Analog(5MP) + 2CH IP camera(1080P)

4CH Coaxial Audio

Model	SC-HVR5M04-S1
Video	
Format	IPC: ONVIF Profile S / T Analog: NTSC/EIA or PAL/CCIR or AHD/TVI/CVI
Input	IP-CAM: up to 2-CH 1080p/720p; Analog: up to 4-CH AHD/TVI/CVI 5MP, BNC, 1Vp-p /75ohm Total max.6CH: 4CH Analog+2CH IPC
Output	HDMI/VGA – up to 1920*1080 ; CVBS
Audio	
Input	4 RCA-jack connectors, line-in level (100mV–1Vrms) ; 4-CH via Coaxial cable
Output	HDMI; 1 RCA-jack connector, line-out level (up to 1Vrms)
System	
HDD	1 x 3.5” SATA HDD
HDD Extension	1 eSATA connector for up to 5 external HDDs
Backup	USB 2.0 x 2 ; Self playback for backup files
RS-485	2-pin for keyboard and/or PTZ control
RS-232	Optional 1 D-type male connector
Operating Temperature	0~55° C
size	255(W) x 220(D) x 42(H)mm
weight	0.8 KG (without HDD)
Power source	12VDC, 2.5A (max 30W)
Record	
Compression	audio: ADPCM
Max frame rate	IPC: 60/50fps@1080p/720p, Up to 40Mbps incoming bandwidth for IPC Analog: 48fps@5MP-lite, 60fps@4MP-lite, 80fps@3MP-lite, 60fps@1080p, 120fps@1080p-lite/720p/960H
Pre-record time	0 – 10 sec
Post-record	0 – 60 min
Display	
Split windows	1,4,7
Frame rate	Up to 30/25 FPS per display window
Digital Zoom	X2, X4

Playback	
Max frame rate	48fps@5MP-lite, 60fps@4MP-lite, 80fps@3MP-lite, 60fps@1080p, 120fps@1080p-lite/720p/960H
Search	Smart search, Date/time, Camera, Alarm, Motion & Video loss
Operation	Play, Fast Forward, Backward, Pause, Stop, Snapshot, etc.
Network	
Ethernet	1 RJ-45 10M/100M bps Ethernet connector
Protocol	TCP/IP, HTTP, PPPoE, DHCP, DDNS, FTP, TSP, NTP, RTSP, UPnP, P2P
Remote Users	Up to 8 users simultaneously
Remote	Support Windows 10/8/7, N-streaming live view, I.E/Firefox/Chrome DVRs, App for Mac/iPhone/iPad/Android phone and Tablet IPC
Alarm	
Input	4 contact or TTL/CMOS signal , polarity selectable
Output	1 Normally open or normally closed relay outputs
Reliability	
System recovery	Auto power on after power loss recovery (with Watch Dog Timer)
Timer	Built-in real time clock
Security	Multi-level password (4 levels, up to 18 accounts) protection with authentication key for remote access